


ORS 26" x 36" TWO STAGE HOLE OPENER SPECIFICATION SHEET

Specifications	
Pilot hole diameter	17 ½"
Hole Opener Diameter 1 st Stage	26"
Hole Opener Diameter 2 nd Stage	36"
Cutter Quantity 1 st Stage	3 EA
Cutter Quantity 2 nd Stage	3 EA
Fish Neck Length (Approx. New)	50"
Fishing neck diameter	9 ½"
ID	3"
Overall Length (Approx. New)	3,94 Mtr.
Thread type top	7 5/8" Reg. Pin
Thread type bottom	7 5/8" Reg. Box
Number of nozzles	6 EA
Weight	3.300 KG
Cutter Type	Mill Tooth/TCI
Bearing Type	Open bearing unit
Inner Bearing Race	Cam Lock
Pressure loss across tool at max. flow	NA
Pressure loss across tool at min. flow	40 – 50 BAR For clean
Max. Solid content	3 – 5%
Max. Sand content	3 – 5%

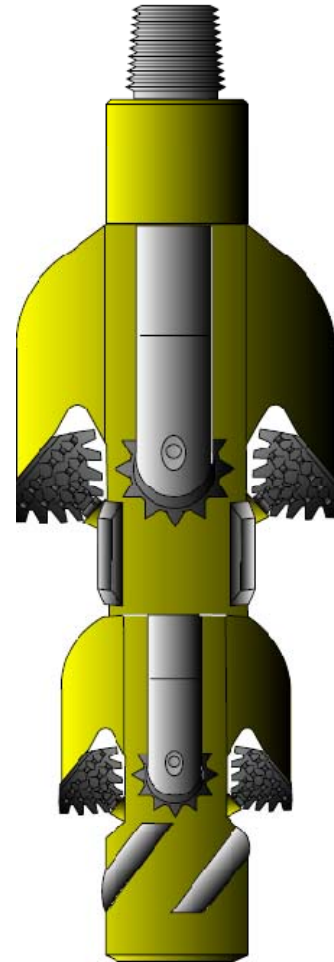

Important; Ensure that cutters are locked by turning them in right hand direction by hand before use !

→

Recommended Drilling Parameters:	
MAXIMUM FLOW RATE	4000 LPM
MINIMUM FLOW RATE	2500 LPM
ROTARY SPEED	50 – 80 RPM
WEIGHT ON HOLE OPENER	32.000 KG