


Cold Cutter

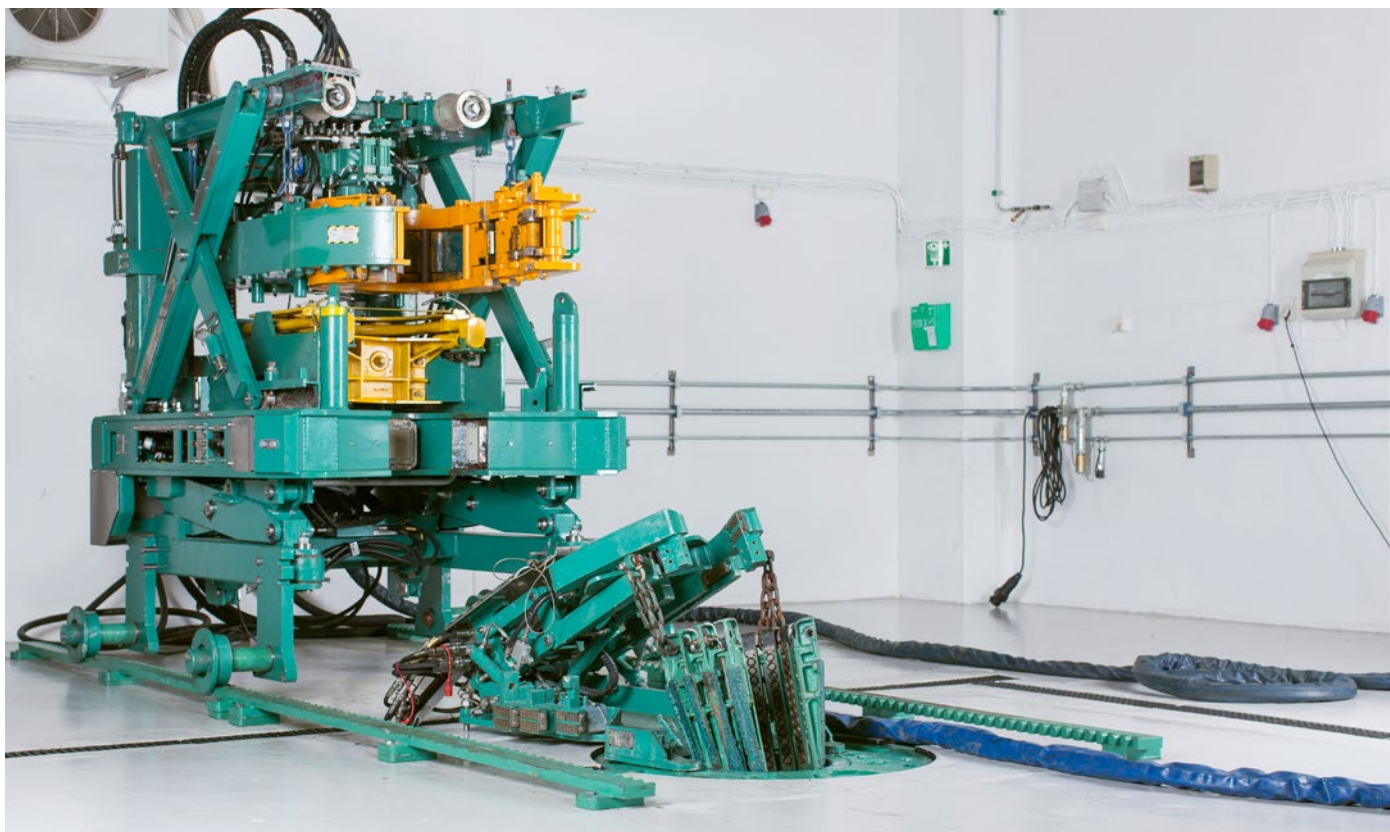

The OWS Cold Cutter is a pre-installed water-cooled saw that fits for installation in most of our tong systems, without any modifications and no use of extra rig time.

FEATURES:

The compact and easy to fit Cold Cutter Saw enables crews to quickly switch to the saw if a connection is not able to be broken out with the OWS 100K tong system. The OWS Cold Cutter will be cost saving to the client, as it eliminates the need for any additional service providers - specializing in cutting tubular.





The cutter is compact and can be transported on a Euro-pallet.



The cutter is an efficient tool, with clean cuts and excellent results.

SPECIFICATIONS:

Capacity	6"-18" pipe
Drive	Hydraulic
Weight	153 kg
Stroke	2"

EXAMPLES: CASING DATA SHEET FOR COLDCUTTER 5,5" TO 14"

Size	Weight	Wall Thickness		Estimated time to cut
5.5"	23 PPF	0.415"	10.54mm	11.5 min
6.625"	32 PPF	0.475"	12.07mm	13.8 min
7"	35 PPF	0.498"	12.65mm	17.0 min
9.875"	66.9 PPF	0.668"	16.97mm	24.0 min
10.750"	73.20 PPF	0.672"	17.07mm	28.0 min
14"	100.00 PPF	0.700"	17.78mm	35.0 min

NORWAY

Hammaren 19
P.O.Box 152
NO-4098 Tananger
Norway

Tel: +47 51 64 84 00
Fax: +47 51 64 84 01
ows@ows.no

UNITED KINGDOM

Crawpeel Road
Altens Industrial Estate
Altens Aberdeen AB12 3LG
Scotland

Tel: +44(1)224 85 6000
Fax: +44(1)224 85 6001
owsuk@odfjelldrilling.com

NETHERLANDS

Stehpenonweg 18^a
7741 KW Coevorden
The Netherlands

Tel: +31 (0) 524 527 000
Fax: +31 (0) 524 527 001
owsnl@odfjelldrilling.com

ROMANIA

Aricestii Rahtivani
-Ploiesti West Park
Cladirea SME, Mod 13&15,
Birou 3B
107025-Prahova
Romania

Tel: +40(0)344 220 102 /
+40 (0)344 220 106
owsro@ows.no

MIDDLE EAST, AFRICA, ASIA

Office 3201, 32nd floor
Tiffany Tower,
W-Cluster, JLT
P.O. 17354
Dubai UAE

Tel: +971 4 3640500
Fax: +971 4 3640501
ows@ows.no