



Odfjell Well Services - Advanced Casing Deployment

5-1/2" DEFUSE HIGH SPEED REAMER

The 5-1/2" DEFUSE High Speed Reamer utilizes high-speed coupled with hydraulic horsepower to rotate a jetted casing shoe. DEFUSE High Speed Reamer is PDC drillable (sizes 4-1/2" and larger). Available with or without integral float.

Specifications

Length	57.5 in (1,461 mm)
Bladed Dia.	6+ in (152+ mm)
Flow Rate	100 - 600 GPM (379 - 2,271 LPM)
Speed	300+ RPM
Torque	< 2,100 ft-lbs

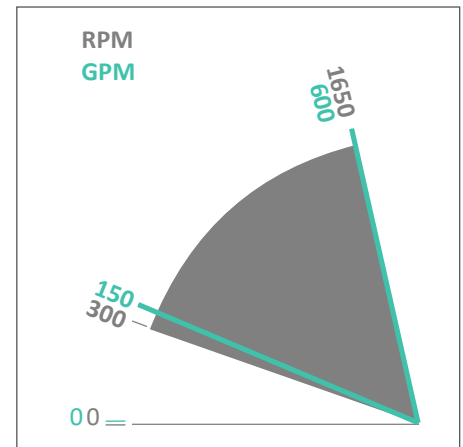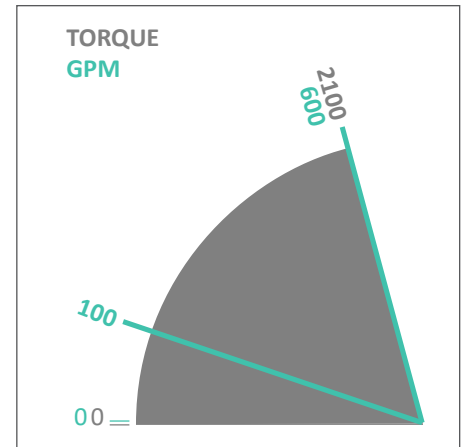

MAX.

Pres. Drop	1,200 psi (8,274 kPa)
Weight	32,000 lbf (14.2 kdaN)
Overpull	32,000 lbf (14.2 kdaN)

Hole / Casing

Hole Size	6.50+ in (165+ mm)
Casing/Liner Size	5.50+ in (140+ mm)
Top Connection	as per requirement

