



Odfjell Well Services - Advanced Casing Deployment

7" DEFUSE HIGH SPEED REAMER

The 7" DEFUSE High Speed Reamer utilizes high-speed coupled with hydraulic horsepower to rotate a jetted casing shoe. DEFUSE High Speed Reamer is PDC drillable (sizes 4-1/2" and larger). Available with or without integral float.

Specifications

Length	63.5 in (1,613 mm)
Bladed Dia.	8.25+ in (210+ mm)
Flow Rate	130 - 700 GPM (492 - 2,650 LPM)
Speed	300+ RPM
Torque	< 2,900 ft-lbs

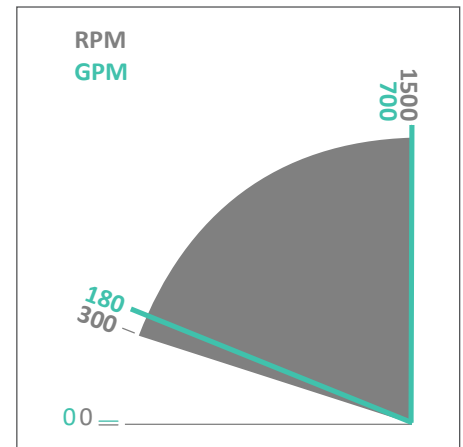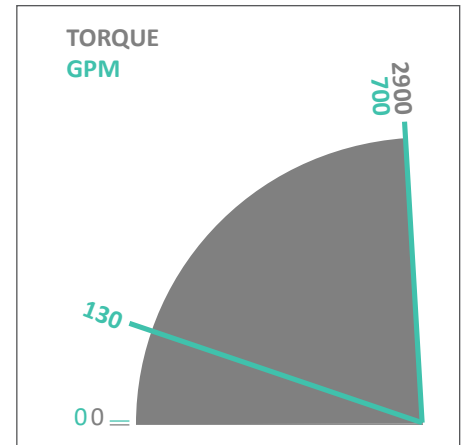

MAX.

Pres. Drop	1,100 psi (7,585 kPa)
Weight	40,500 lbf (18 kdaN)
Overpull	40,500 lbf (18 kdaN)

Hole / Casing

Hole Size	8.375+ in (213+ mm)
Casing/Liner Size	7.00+ in (178+ mm)
Top Connection	as per requirement

