



Odfjell Well Services - Advanced Casing Deployment

9-5/8" DEFUSE HIGH SPEED REAMER

The 9-5/8" DEFUSE High Speed Reamer utilizes high-speed coupled with hydraulic horsepower to rotate a jetted casing shoe. DEFUSE High Speed Reamer is PDC drillable (sizes 4-1/2" and larger). Available with or without integral float.

Specifications

Length	65.5 in (1,130 mm)
Bladed Dia.	12+ in (305+ mm)
Flow Rate	150 - 1,200 GPM (568 - 4,543 LPM)
Speed	250+ RPM
Torque	< 3,700 ft-lbs

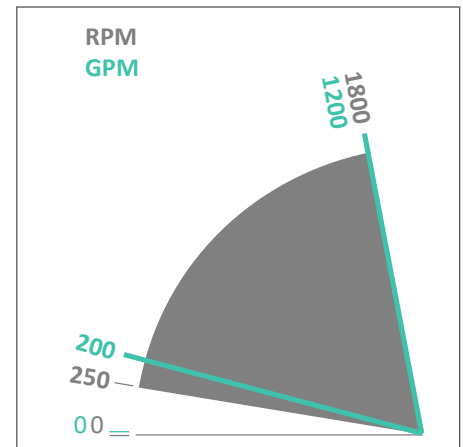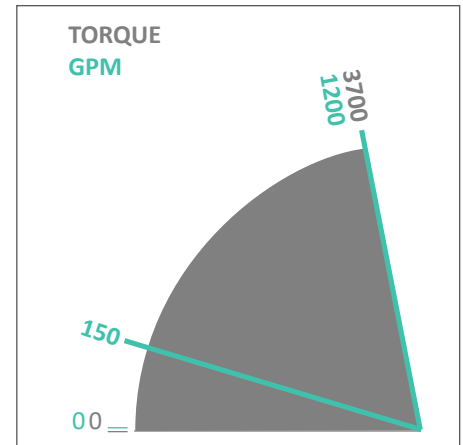

MAX.

Pres. Drop	990 psi (6,826 kPa)
Weight	55,000 lbf (24.5 kdaN)
Overpull	55,000 lbf (24.5 kdaN)

Hole / Casing

Hole Size	12.25+ (305+ mm)
Casing/Liner Size	9.625+ in (286+ mm)
Top Connection	as per requirement

