



Odfjell Well Services - Advanced Casing Deployment

13-3/8" DEFUSE HIGH SPEED REAMER

The 13-3/8" DEFUSE High Speed Reamer utilizes high-speed coupled with hydraulic horsepower to rotate a jetted casing shoe. DEFUSE High Speed Reamer is PDC drillable (sizes 4-1/2" and larger). Available with or without integral float.

Specifications

Length	70 in (1,778 mm)
Bladed Dia.	14.5+ in (368+ mm)
Flow Rate	200 - 1,200 GPM (757 - 4,543 LPM)
Speed	250+ RPM
Torque	< 4,800 ft-lbs

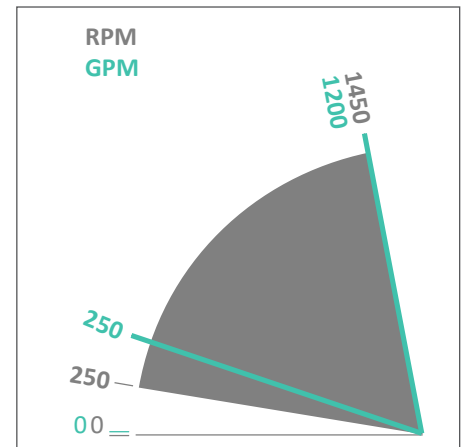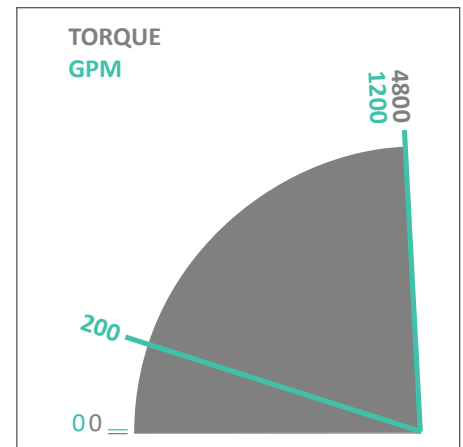

MAX.

Pres. Drop	800 psi (5,516 kPa)
Weight	63,000 lbf (28 kdaN)
Overpull	63,000 lbf (28 kdaN)



Hole / Casing

Hole Size	14.75+ (375+ mm)
Casing/Liner Size	13.375+ in (340+ mm)
Top Connection	as per requirement