



Odfjell Well Services - Advanced Casing Deployment

5-1/2" REACH HIGH TORQUE REAMER

The 5-1/2" REACH High Torque Reamer utilizes varied speed and torque created by a fluid-driven drive mechanism. It is designed to get casing and liners to bottom with the utmost efficiency. The REACH High Torque Reamer is PDC drillable (4 1/2" and larger). Available with or without integral float.

Specifications

Length	105 in (2,667 mm)
Bladed Dia.	6+ in (152+ mm)
Flow Rate	100 - 600 GPM (379 - 2,271 LPM)
Speed	30+ RPM
Torque	< 4,700 ft-lbs

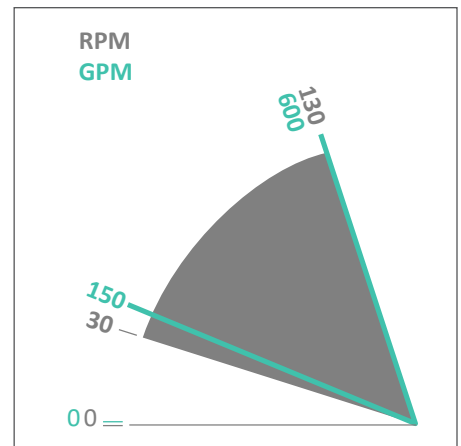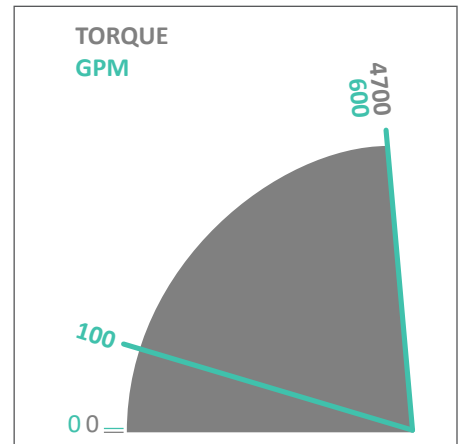

MAX.

Pres. Drop	1,400 psi (9,653 kPa)
Weight	38,000 lbf (16.9 kdaN)
Overpull	38,000 lbf (16.9 kdaN)

Hole / Casing

Hole Size	6.50+ in (165+ mm)
Casing/Liner Size	5.50+ in (140+ mm)
Top Connection	as per requirement

