



# Odfjell Well Services - Advanced Casing Deployment

## 7" REACH HIGH TORQUE REAMER

The 7" REACH High Torque Reamer utilizes varied speed and torque created by a fluid-driven drive mechanism. It is designed to get casing and liners to bottom with the utmost efficiency. The REACH High Torque Reamer is PDC drillable (4 1/2" and larger). Available with or without integral float.

### Specifications

Length	125 in (3,175 mm)
Bladed Dia.	8.25+ in (210+ mm)
Flow Rate	130 - 700 GPM (492 - 2650 LPM)
Speed	30+ RPM
Torque	< 6,800 ft-lbs

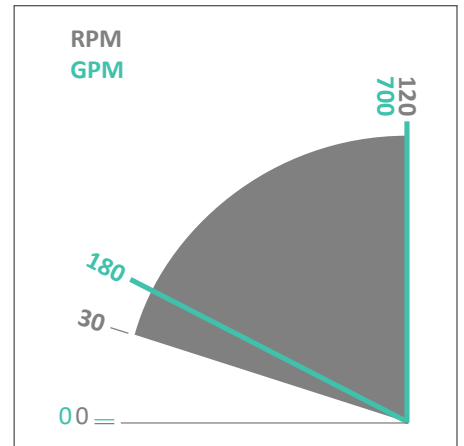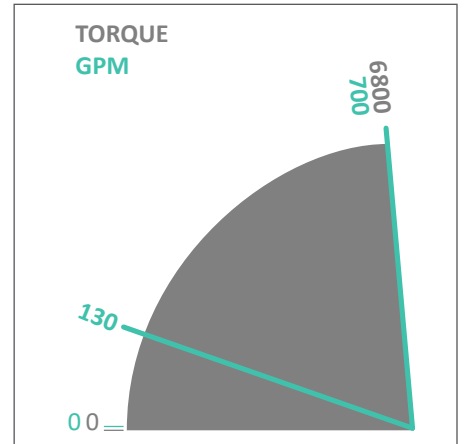

### MAX.

Pres. Drop	1,600 psi (11,000 kPa)
Weight	42,000 lbf (18.7 kdaN)
Overpull	42,000 lbf (18.7 kdaN)

### Hole / Casing

Hole Size	8.375+ in (213+ mm)
Casing/Liner Size	7+ in (178+ mm)
Top Connection	as per requirement

