



Odfjell Well Services - Advanced Casing Deployment

9-5/8" REACH HIGH TORQUE REAMER

The 9-5/8" REACH High Torque Reamer utilizes varied speed and torque created by a fluid-driven drive mechanism. It is designed to get casing and liners to bottom with the utmost efficiency. The REACH High Torque Reamer is PDC drillable (4 1/2" and larger). Available with or without integral float.

Specifications

Length	112 in (2,845 mm)
Bladed Dia.	12+ in (305+ mm)
Flow Rate	150 - 900 GPM (568 - 3,407 LPM)
Speed	30+ RPM
Torque	< 9,000 ft-lbs

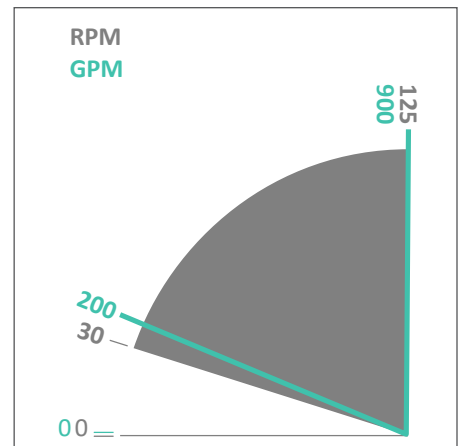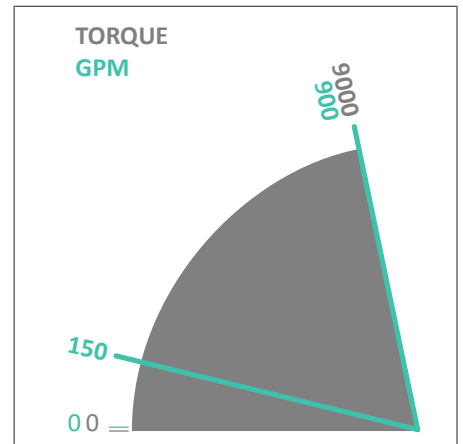

MAX.

Pres. Drop	1,500 psi (10,343 kPa)
Weight	60,000 lbf (26.7 kdaN)
Overpull	60,000 lbf (26.7 kdaN)

Hole / Casing

Hole Size	12.25+ (305+ mm)
Casing/Liner Size	9.625+ in (286+ mm)
Top Connection	as per requirement

