
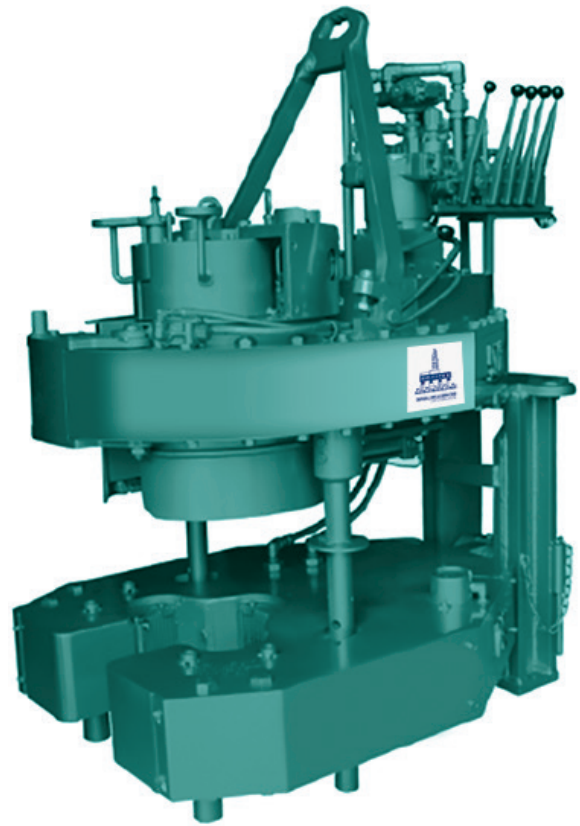


7-5/8" Casing Tong c/w 8-5/8" Back Up

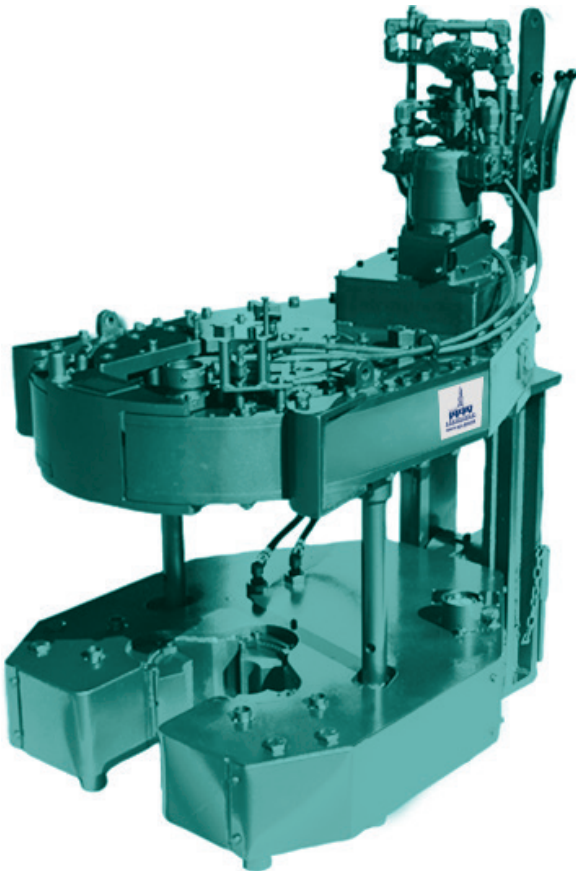

The 7-5/8" Casing Tong with the integral 8-5/8" Back-Up is the ideal casing tong for running casing and tubing from 7-5/8" down to 2-1/16".

SPECIFICATIONS:

For running tubulars with (high) chrome content OWS has fitted the Chrome Master Head on the 7-5/8" Casing tongs. With this Chrome Master Head OWS can ensure a full 360° wrap on the body of the tubular with limited indentation on both steel and coating.



FEATURES:

The 7-5/8" Casing tong is an open-throat design that can handle tubulars from as small as 2-1/16" to as large as 7-5/8" in diameter. The system features two jaws in the tong and three jaws in the backup, which encircle the pipe. Wraparound jaws and dies, combined with our low-friction jaw technology, constant radial load cam system, and compensating jaw design, provide exceptional gripping capabilities with reduced pipe deformation, stress, and marking. Using our non-marking aluminum die system or GRIT FACE™ Dies in the tong and backup will allow stainless steel corrosion-resistant alloy (CRA) to be run as quickly and easily as traditional tongs run conventional steel tubulars.

The 7-5/8" Casing tong can be fitted with Chrome Master accessory upon clients request. With the Chrome Master the operator can manually operate and control the pressure intensifier system. This allows non-marking of thin-walled, low strength or expandable tubular goods.

SPECIFICATIONS:

Maximum Torque	30,000 ft/lbs / 40,675 Nm
Maximum Operating Pressure	3,000 P.S.I. / 207 Bar
RPM @ 35 GPM / 132 LPM / Manual Gearbox	Max allowable flow rate / 65 GPM / 227 LPM
High	42
Low	7
Tong Handle Length	36" / 91,4 cm
Back-up handle length	32" / 81,3 cm
Length	56" / 142,2 cm
Width	34" / 86,4 cm
Weight - Tong w/backup (approximate)	2,550 lbs / 1,159 kg
2 Tong jaw sizes limited to 14,000 ft/lbs. / 30,000 ft/lbs	2-1/16" thru 4-1/2" / 4-1/2" thru 7-5/8"
1 Back-up jaw size	2-1/16" thru 8-3/4"

NORWAY

Hammaren 19
 P.O.Box 152
 NO-4098 Tananger
 Norway
 Tel: +47 51 64 84 00
 Fax: +47 51 64 84 01
 ows@ows.no

UNITED KINGDOM

Crawpeel Road
 Altens Industrial Estate
 Altens Aberdeen AB12 3LG
 Scotland
 Tel: +44(1)224 85 6000
 Fax: +44(1)224 85 6001
 owsuk@odfjelldrilling.com

NETHERLANDS

Stehpenonweg 18^a
 7741 KW Coevorden
 The Netherlands
 Tel: +31 (0) 524 527 000
 Fax: +31 (0) 524 527 001
 owsnl@odfjelldrilling.com

ROMANIA

Aricestii Rahtivani
 -Ploiesti West Park
 Cladirea SME, Mod 13&15,
 Birou 3B
 107025-Prahova
 Romania
 Tel: +40(0)344 220 102 /
 +40 (0)344 220 106
 owsro@ows.no

**MIDDLE EAST,
 AFRICA, ASIA**

Odfjell Well Services Ltd,
 Plot: B56CR01, Al Hesah
 Street, N600, Junction 9,
 Before exit gate 8, Jafza
 North,
 Post Box: 17354, Jebel Ali
 Freezone, Dubai, United
 Arab Emirates
 Mob :+971558856464